

ELECTRIC HEATER

RE/L



2 YEAR WARRANTY **<95M³**



EASY INSTALLATION



SERVICES

Ti²²
TITANE INSIDE

MADE IN FRANCE

- + L-shape, space-saving
- + 1 or 3 phase wiring (on-site configuration)
- + Mechanical thermostat

DESCRIPTION

- Control box
- Rotating mechanical 16-40°C thermostat
- Positive safety high temperature limiters
- Watertightness of electrical resistances with an EPDM collar
- Hypalon moulded electric connections
- Flow switch
- Power contactor
- Single or 3 phase wiring (on-site configuration)
- RE/L 3, 6 and 9: simplified single-phase 230V -50/60Hz / three-phase 400V-50/60Hz power (three-phase 230V on request)
- RE/L 12: 400V-50/60Hz only

PRODUCT REFERENCES

Model	RE/L 3	RE/L 6	RE/L 9	RE/L 12
Standard Model	W40LE03	W40LE06	W40LE09	W40LE12


HEATING PERFORMANCE & TECHNICAL FEATURES

Model	RE/L 3	RE/L 6	RE/L 9	RE/L 12
Operating power (kW)**	3	6	9	12
Maximum operating power Tri 400 V (A)***	5	9	13	18
Power cable size for tri 400 V (mm ²)****	5 x 2,5		5 x 4	
Maximum operating power Mono 230 V (A)***	14	27	40	
Power cable size for Mono 230 V (mm ²)****	3 x 4	3 x 6	3 x 10	
Min. flow (m ³ /h)	5			
Max. flow (m ³ /h)	22			
Hydraulic connection	PVC Ø 50 ou Ø 63			

* Private open-air pool, temperate climate with an isothermal cover from May 15th to September 15th. ** Manufacturing tolerance of + or -5%. *** Tolerance operating voltage +6 -10%. Grid power supply. **** For a maximum length of 20 metres.

WEIGHT AND DIMENSIONS

Model	RE/L 3	RE/L 6	RE/L 9	RE/L 12
Weight (kg)	4		5	

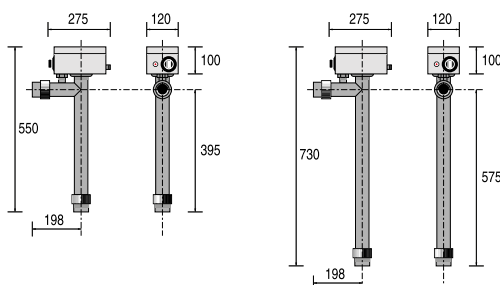

INSTALLATION

- Shipped with wall-mount bracket.
- Supports any flow direction: just turn the device to match the water flow direction.
- In-line PVC hydraulic connection, Ø50 or 63.

