

ELECTRIC HEATER

RE/U



- + Full digital regulation
- + 2-stage power management
- + Maximum robustness

DESCRIPTION

- Control box with precision thermostat $\pm 0.5^{\circ}\text{C}$
- Digital display and timer
- Positive safety high temperature limiter
- Pin water tightness using EPDM collars
- HYPALON electric connections
- Flow switch
- Power contactors
- Luminous control switches + indicators
- Pin water tightness using EPDM collars
- Single-phase 230V-50/60Hz or three-phase 400 V depending on model

2 YEAR WARRANTY **<195M³**



Ti²² TITANE INSIDE



PRODUCT REFERENCES

Model	RE/U 12M	RE/U 15M	RE/U 15T	RE/U 18T	RE/U 21T	RE/U 24T
Standard Model	W40TIT12M	W40TIT15M	W40TIT15	W40TIT18	W40TIT21	W40TIT24


HEATING PERFORMANCE & TECHNICAL FEATURES

Model	RE/U 12M	RE/U 15M	RE/U 15T	RE/U 18T	RE/U 21T	RE/U 24T
Operating power (kW)**	6 + 6	6 + 9		9 + 9	9 + 12	12 + 12
Maximum operating power Tri 400 V (A)***	53	66	22	26	31	35
Power cable size for tri 400 V (mm ²)****	3 x 16		5 x 6		5 x 10	
Min. flow (m ³ /h)				5		
Max. flow (m ³ /h)				22		
Hydraulic connection	PVC Ø 50 ou Ø 63					

* Private open-air pool, temperate climate with an isothermal cover from May 15th to September 15th. ** Manufacturing tolerance of + or -5%. *** Tolerance operating voltage +6 -10%. Grid power supply. **** For a maximum length of 20 metres.

WEIGHT AND DIMENSIONS

Weight (kg)	12
-------------	----

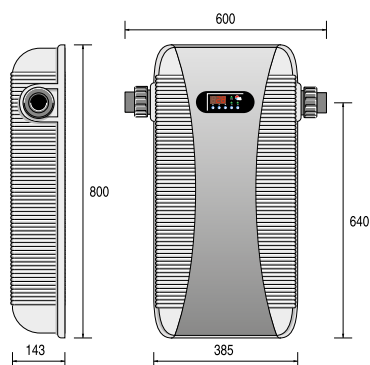

INSTALLATION

- In-line PVC hydraulic connection, Ø63 (exterior) or Ø50 (interior).
- Supports any flow direction: just turn the flow switch and reverse the control and safety sensors.

